

NOTES

Plans Used:

Data calculated from the following file(s):

- Sheet C0.1 from "2001 Tarob Court-Combined Grading, Improvement, Landscape and Joint Trench Plans.pdf" (plot date 9/1/22)

Materials:

01. AC Pavement 4"/10" (C3.0)
02. Bioretention 18"/12" (C5.2)
03. Driveway Entrance 6"/6" (assumed)
04. Driveway Lots 6"/6" (assumed)
05. Pervious Pavers 3.125"/2"/4"/14" (C5.2)(pavers assumed)
06. Sidewalk 4"/6" (C3.0)
07. Valley Gutter 6"/6" (assumed)

Notes:

01. No Offsite was calculated due to no Offsite plans were provided
02. Building Area includes Garage

Other Assumptions:

01. PCC & AB in Curb Ramps are included in the Sidewalk item, but also given as a Count for a total number of Curb Ramps on the project.

SAMPLE COMMERCIAL SITE

COMPANY NAME

CLIENT NAME

CLIENT NUMBER

CLIENT EMAIL

REFERENCE # :

MATERIALS

DATE

Material 1


Material	Structure	Section (Inches)	Multiplier	Quantity	Unit
AB	AC Pavement	10.0000	0.00308600	231.72	CY
AB	Driveway Entrance	6.0000	0.00308600	5.78	CY
AB	Driveway Lots	6.0000	0.00308600	23.48	CY
AB	Sidewalk	6.0000	0.00308600	53.81	CY
AB	Valley Gutter	6.0000	0.00308600	1.09	CY
Total:				315.88	CY
AC	AC Pavement	4.0000	0.00308600	92.68	CY
AC Pavement	AC Pavement	1.0000	1.00000000	7,508.89	SF
Bio-Retention Soil	Bioretention	18.0000	0.00308600	41.47	CY
Bioretention	Bioretention	1.0000	1.00000000	746.48	SF
Building 1	Building 1	1.0000	1.00000000	9,918.20	SF
Building 2	Building 2	1.0000	1.00000000	9,918.17	SF
Class II Permeable	Bioretention	12.0000	0.00308600	27.64	CY
Driveway Entrance	Driveway Entrance	1.0000	1.00000000	312.00	SF
Driveway Lots	Driveway Lots	1.0000	1.00000000	1,270.64	SF
No. 2 Stone	Pervious Pavers	14.0000	0.00308600	196.99	CY
No. 8 Bedding	Pervious Pavers	2.0000	0.00308600	28.14	CY
No. 57 Stone	Pervious Pavers	4.0000	0.00308600	56.28	CY
Pavers	Pervious Pavers	1.0000	1.00000000	4,559.45	SF
PCC	Driveway Entrance	6.0000	0.00308600	5.78	CY
PCC	Driveway Lots	6.0000	0.00308600	23.48	CY
PCC	Sidewalk	4.0000	0.00308600	35.87	CY
PCC	Valley Gutter	6.0000	0.00308600	1.09	CY
Total:				66.22	CY
Pervious Pavers	Pervious Pavers	1.0000	1.00000000	4,559.45	SF
Sidewalk	Sidewalk	1.0000	1.00000000	2,906.06	SF
Truncated Domes	Truncated Domes	1.0000	1.00000000	70.74	SF
Valley Gutter	Valley Gutter	1.0000	1.00000000	58.92	SF
Curb & Gutter	Curb & Gutter	1.0000	1.00000000	451.94	LF
Curb & Gutter (deepened at pavers)	Curb & Gutter (deepened at pavers)	1.0000	1.00000000	32.17	LF
Flush Curb & Gutter (deepened at pavers)	Flush Curb & Gutter (deepened at pavers)	1.0000	1.00000000	362.36	LF
Retaining Wall	Retaining Wall	1.0000	1.00000000	677.48	LF
Vertical Curb	Vertical Curb	1.0000	1.00000000	65.72	LF

Material 2

Material	Structure	Section (Inches)	Multiplier	Quantity	Unit
Curb Ramp	Curb Ramp	1.0000	1.00000000	4.00	EA

Structure	Material	Section (Inches)	Multiplier	Quantity	Unit
AC Pavement	AC Pavement	1.0000	1.00000000	7,508.89	SF
AC Pavement	AC	4.0000	0.00308600	92.68	CY
AC Pavement	AB	10.0000	0.00308600	231.72	CY
Bioretention	Bioretention	1.0000	1.00000000	746.48	SF
Bioretention	Bio-Retention Soil	18.0000	0.00308600	41.47	CY
Bioretention	Class II Permeable	12.0000	0.00308600	27.64	CY
Building 1	Building 1	1.0000	1.00000000	9,918.20	SF
Building 2	Building 2	1.0000	1.00000000	9,918.17	SF
Curb & Gutter	Curb & Gutter	1.0000	1.00000000	451.94	LF
Curb & Gutter (deepend at pavers`	Curb & Gutter (deepend at pavers`	1.0000	1.00000000	32.17	LF
Curb Ramp	Curb Ramp	1.0000	1.00000000	4.00	EA
Driveway Entrance	Driveway Entrance	1.0000	1.00000000	312.00	SF
Driveway Entrance	PCC	6.0000	0.00308600	5.78	CY
Driveway Entrance	AB	6.0000	0.00308600	5.78	CY
Driveway Lots	Driveway Lots	1.0000	1.00000000	1,270.64	SF
Driveway Lots	PCC	6.0000	0.00308600	23.48	CY
Driveway Lots	AB	6.0000	0.00308600	23.48	CY
Flush Curb & Gutter (deepened at pavers`	Flush Curb & Gutter (deepened at pavers`	1.0000	1.00000000	362.36	LF
Pervious Pavers	Pervious Pavers	1.0000	1.00000000	4,559.45	SF
Pervious Pavers	Pavers	1.0000	1.00000000	4,559.45	SF
Pervious Pavers	No. 8 Bedding	2.0000	0.00308600	28.14	CY
Pervious Pavers	No. 57 Stone	4.0000	0.00308600	56.28	CY
Pervious Pavers	No. 2 Stone	14.0000	0.00308600	196.99	CY
Retaining Wall	Retaining Wall	1.0000	1.00000000	677.48	LF
Sidewalk	Sidewalk	1.0000	1.00000000	2,906.06	SF
Sidewalk	PCC	4.0000	0.00308600	35.87	CY
Sidewalk	AB	6.0000	0.00308600	53.81	CY
Truncated Domes	Truncated Domes	1.0000	1.00000000	70.74	SF
Valley Gutter	Valley Gutter	1.0000	1.00000000	58.92	SF
Valley Gutter	PCC	6.0000	0.00308600	1.09	CY
Valley Gutter	AB	6.0000	0.00308600	1.09	CY
Vertical Curb	Vertical Curb	1.0000	1.00000000	65.72	LF

AREA

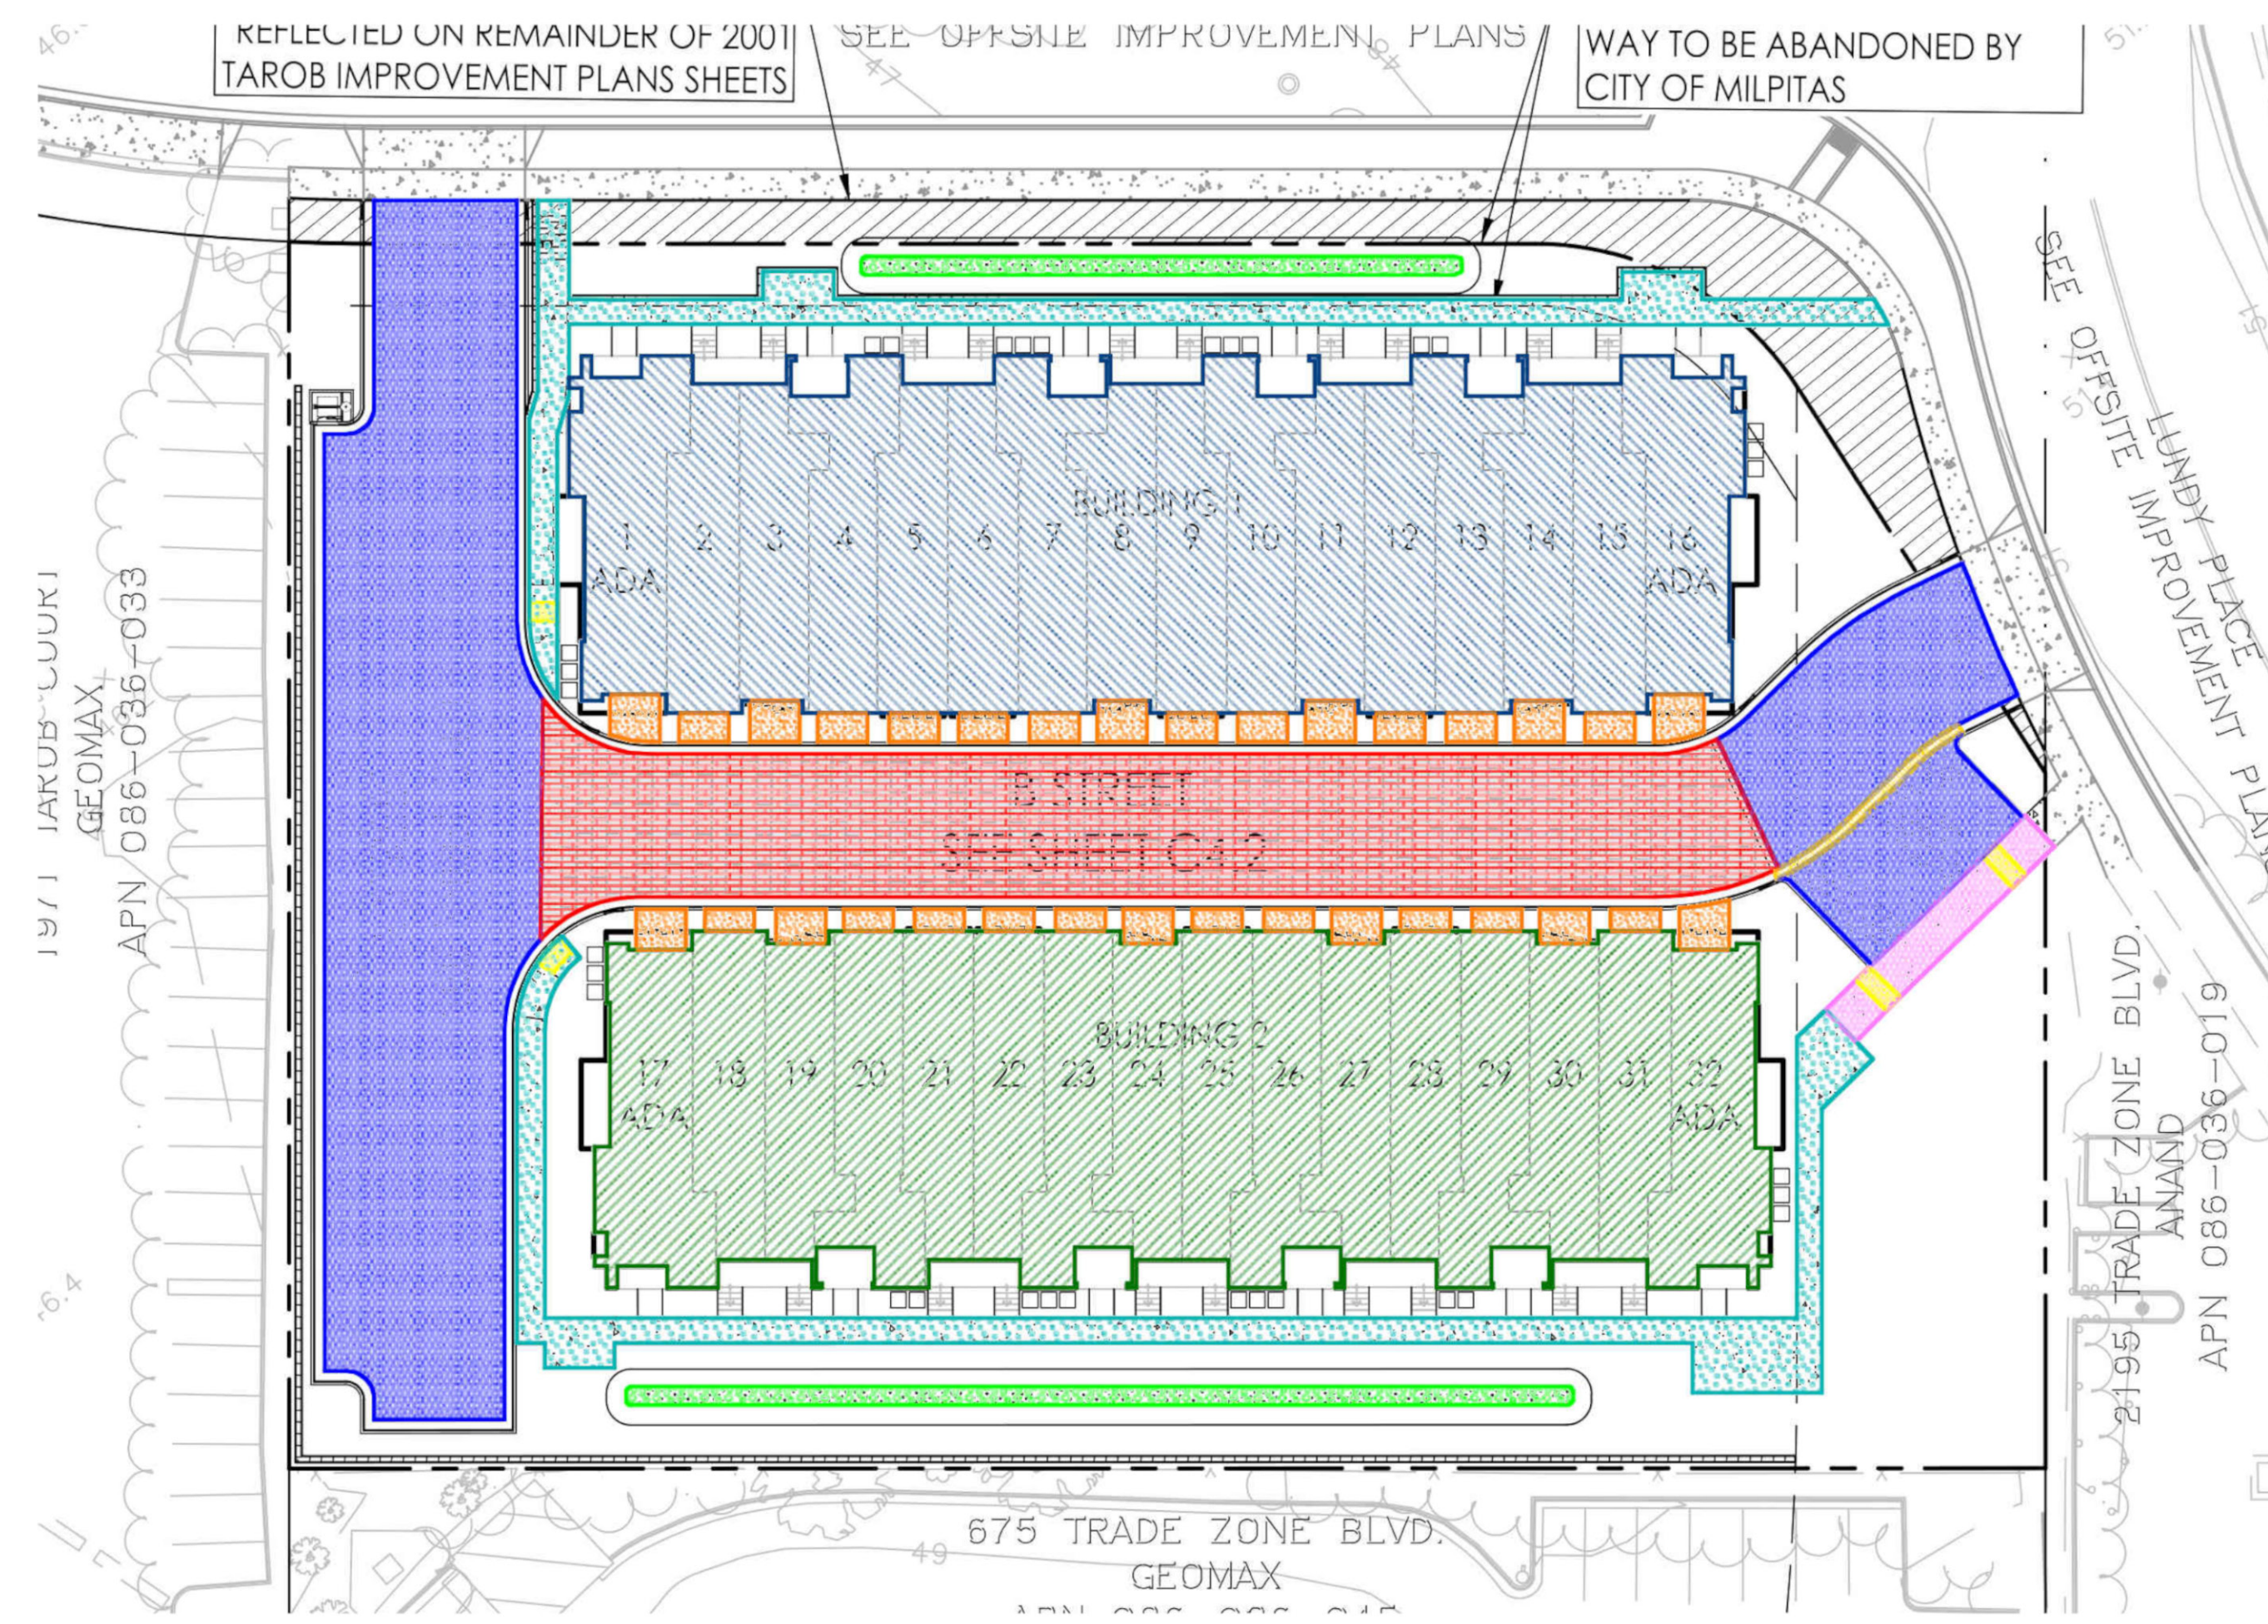

Structure	Material	Measure	Section	Multiplier	Quantity	Unit
AC Pavement	AC Pavement	7,508.89	1.0000	1.00000000	7,508.89	SF
AC Pavement	AC	7,508.89	4.0000	0.00308600	92.88	CY
AC Pavement	AB	7,508.89	10.0000	0.00308600	231.72	CY
Bioretention	Bioretention	746.48	1.0000	1.00000000	746.48	SF
Bioretention	Bio-Retention Soil	746.48	18.0000	0.00308600	41.47	CY
Bioretention	Class II Permeable	746.48	12.0000	0.00308600	27.64	CY
Building 1	Building 1	9,918.20	1.0000	1.00000000	9,918.20	SF
Building 2	Building 2	9,918.17	1.0000	1.00000000	9,918.17	SF
Curb & Gutter	Curb & Gutter	451.94	1.0000	1.00000000	451.94	LF
Curb & Gutter (deepened at pavers)	Curb & Gutter (deepened at pavers)	32.17	1.0000	1.00000000	32.17	LF
Curb Ramp	Curb Ramp	4.00	1.0000	1.00000000	4.00	EA
Driveway Entrance	Driveway Entrance	312.00	1.0000	1.00000000	312.00	SF
Driveway Entrance	PCC	312.00	6.0000	0.00308600	5.78	CY
Driveway Entrance	AB	312.00	6.0000	0.00308600	5.78	CY
Driveway Lots	Driveway Lots	1,270.64	1.0000	1.00000000	1,270.64	SF
Driveway Lots	PCC	1,270.64	6.0000	0.00308600	23.48	CY
Driveway Lots	AB	1,270.64	6.0000	0.00308600	23.48	CY
Flush Curb & Gutter (deepened at pavers)	Flush Curb & Gutter (deepened at pavers)	362.36	1.0000	1.00000000	362.36	LF
Pervious Pavers	Pervious Pavers	4,559.45	1.0000	1.00000000	4,559.45	SF
Pervious Pavers	Pavers	4,559.45	1.0000	1.00000000	4,559.45	SF
Pervious Pavers	No. 8 Bedding	4,559.45	2.0000	0.00308600	28.14	CY
Pervious Pavers	No. 57 Stone	4,559.45	4.0000	0.00308600	56.28	CY
Pervious Pavers	No. 2 Stone	4,559.45	14.0000	0.00308600	196.99	CY
Retaining Wall	Retaining Wall	677.48	1.0000	1.00000000	677.48	LF
Sidewalk	Sidewalk	2,906.06	1.0000	1.00000000	2,906.06	SF
Sidewalk	PCC	2,906.06	4.0000	0.00308600	35.87	CY
Sidewalk	AB	2,906.06	6.0000	0.00308600	53.81	CY
Truncated Domes	Truncated Domes	70.74	1.0000	1.00000000	70.74	SF
Valley Gutter	Valley Gutter	58.92	1.0000	1.00000000	58.92	SF
Valley Gutter	PCC	58.92	6.0000	0.00308600	1.09	CY
Valley Gutter	AB	58.92	6.0000	0.00308600	1.09	CY
Vertical Curb	Vertical Curb	65.72	1.0000	1.00000000	65.72	LF

LENGTH

