

NOTES

Plans Used:

Data calculated from the following file(s):

- 1725_GARDENS-4 GP_2022-06-10.pdf

Materials:

01. PH4 AC Paving at Lanes: 0.25'/0.95' (Sheet 3 of 11)
02. PH4 AC Paving at Neighborhood St: 0.25'/0.95' (Sheet 3 of 11)
03. PH4 AC Paving at Railroad Ave: 0.40'/1.80' (Sheet 3 of 11)
04. PH4 AC Paving at Turner Ave: 0.40'/1.80' (Sheet 3 of 11)
05. PH4 PCC Driveway Approach: 6"/6" (City of Tracy Std Plan 133/134)
06. PH4 PCC Sidewalk: 6"/6" (City of Tracy Std Plan 122/124/126)
07. PH5 AC Paving at Jack Tuso Dr: 0.40'/1.80' (Sheet 3 of 11)
08. PH5 AC Paving at Lanes: 0.25'/0.95' (Sheet 3 of 11)
09. PH5 AC Paving at Neighborhood St: 0.25'/0.95' (Sheet 3 of 11)
10. PH5 PCC Driveway Approach: 6"/6" (City of Tracy Std Plan 133/134)
11. PH5 PCC Sidewalk: 6"/6" (City of Tracy Std Plan 122/124/126)

SAMPLE SUBDIVISION

COMPANY NAME

CLIENT NAME

CLIENT NUMBER

CLIENT EMAIL

REFERENCE # :

DATE

MATERIALS

Material 1

Material	Structure	Section (Inches)	Multiplier	Quantity	Unit
AB	PH4 AC Paving at Lanes	11.4000	0.00308600	255.04	CY
AB	PH4 AC Paving at Neighborhood S	11.4000	0.00308600	1,365.70	CY
AB	PH4 AC Paving at Railroad Ave	21.6000	0.00308600	1,960.50	CY
AB	PH4 AC Paving at Turner Ave	21.6000	0.00308600	1,557.61	CY
AB	PH4 PCC Driveway Approach	6.0000	0.00308600	201.88	CY
AB	PH4 PCC Sidewalk	6.0000	0.00308600	553.31	CY
AB	PH5 AC Paving at Jack Tuso Dr	21.6000	0.00308600	2,209.93	CY
AB	PH5 AC Paving at Lanes	11.4000	0.00308600	133.89	CY
AB	PH5 AC Paving at Neighborhood S	11.4000	0.00308600	1,312.38	CY
AB	PH5 AC Paving at Turner Ave	21.6000	0.00308600	1,250.53	CY
AB	PH5 PCC Driveway Approach	6.0000	0.00308600	218.16	CY
AB	PH5 PCC Sidewalk	6.0000	0.00308600	520.29	CY
Total:				11,539.22	CY
AC	PH4 AC Paving at Lanes	3.0000	0.00308600	67.11	CY
AC	PH4 AC Paving at Neighborhood S	3.0000	0.00308600	359.39	CY
AC	PH4 AC Paving at Railroad Ave	4.8000	0.00308600	435.67	CY
AC	PH4 AC Paving at Turner Ave	4.8000	0.00308600	346.14	CY
AC	PH5 AC Paving at Jack Tuso Dr	4.8000	0.00308600	491.09	CY
AC	PH5 AC Paving at Lanes	3.0000	0.00308600	35.23	CY
AC	PH5 AC Paving at Neighborhood S	3.0000	0.00308600	345.36	CY
AC	PH5 AC Paving at Turner Ave	4.8000	0.00308600	277.90	CY
Total:				2,357.89	CY
PCC	PH4 PCC Driveway Approach	6.0000	0.00308600	201.88	CY
PCC	PH4 PCC Sidewalk	6.0000	0.00308600	553.31	CY
PCC	PH5 PCC Driveway Approach	6.0000	0.00308600	218.16	CY
PCC	PH5 PCC Sidewalk	6.0000	0.00308600	520.29	CY
Total:				1,493.64	CY
PH4 AC Paving at Lanes	PH4 AC Paving at Lanes	1.0000	1.00000000	7,249.35	SF
PH4 AC Paving at Neighborhood S	PH4 AC Paving at Neighborhood S	1.0000	1.00000000	38,819.92	SF
PH4 AC Paving at Railroad Ave	PH4 AC Paving at Railroad Ave	1.0000	1.00000000	29,411.47	SF
PH4 AC Paving at Turner Ave	PH4 AC Paving at Turner Ave	1.0000	1.00000000	23,367.33	SF
PH4 Pad Area	PH4 Pad Area	1.0000	1.00000000	370,338.05	SF
PH4 PCC Driveway Approach	PH4 PCC Driveway Approach	1.0000	1.00000000	10,904.39	SF
PH4 PCC Sidewalk	PH4 PCC Sidewalk	1.0000	1.00000000	29,881.73	SF
PH4 Truncated Domes	PH4 Truncated Domes	1.0000	1.00000000	577.41	SF
PH5 AC Paving at Jack Tuso Rc	PH5 AC Paving at Jack Tuso Dr	1.0000	1.00000000	33,153.58	SF
PH5 AC Paving at Lanes	PH5 AC Paving at Lanes	1.0000	1.00000000	3,805.83	SF
PH5 AC Paving at Neighborhood S	PH5 AC Paving at Neighborhood S	1.0000	1.00000000	37,304.41	SF
PH5 AC Paving at Turner Ave	PH5 AC Paving at Turner Ave	1.0000	1.00000000	18,760.52	SF
PH5 Pad Area	PH5 Pad Area	1.0000	1.00000000	312,094.94	SF

SAMPLE SUBDIVISION

MATERIAL

Material 2

Material	Structure	Section (Inches)	Multiplier	Quantity	Unit
PH5 PCC Driveway Approach	PH5 PCC Driveway Approach	1.0000	1.00000000	11,783.35	SF
PH5 PCC Sidewalk	PH5 PCC Sidewalk	1.0000	1.00000000	28,099.01	SF
PH5 Truncated Domes	PH5 Truncated Domes	1.0000	1.00000000	749.93	SF
PH4 Curb & Gutter	PH4 Curb & Gutter	1.0000	1.00000000	7,005.53	LF
PH5 Curb & Gutter	PH5 Curb & Gutter	1.0000	1.00000000	6,141.98	LF
PH4 Curb Ramp	PH4 Curb Ramp	1.0000	1.00000000	18.00	EA
PH5 Curb Ramp	PH5 Curb Ramp	1.0000	1.00000000	18.00	EA


Structure 1

Structure	Material	Section (Inches)	Multiplier	Quantity	Unit
PH4 AC Paving at Lanes	PH4 AC Paving at Lanes	1.0000	1.00000000	7,249.35	SF
PH4 AC Paving at Lanes	AC	3.0000	0.00308600	67.11	CY
PH4 AC Paving at Lanes	AB	11.4000	0.00308600	255.04	CY
PH4 AC Paving at Neighborhood S	PH4 AC Paving at Neighborhood S	1.0000	1.00000000	38,819.92	SF
PH4 AC Paving at Neighborhood S	AC	3.0000	0.00308600	359.39	CY
PH4 AC Paving at Neighborhood S	AB	11.4000	0.00308600	1,365.70	CY
PH4 AC Paving at Railroad Ave	PH4 AC Paving at Railroad Ave	1.0000	1.00000000	29,411.47	SF
PH4 AC Paving at Railroad Ave	AC	4.8000	0.00308600	435.67	CY
PH4 AC Paving at Railroad Ave	AB	21.6000	0.00308600	1,960.50	CY
PH4 AC Paving at Turner Ave	PH4 AC Paving at Turner Ave	1.0000	1.00000000	23,367.33	SF
PH4 AC Paving at Turner Ave	AC	4.8000	0.00308600	346.14	CY
PH4 AC Paving at Turner Ave	AB	21.6000	0.00308600	1,557.61	CY
PH4 Curb & Gutter	PH4 Curb & Gutter	1.0000	1.00000000	7,005.53	LF
PH4 Curb Ramp	PH4 Curb Ramp	1.0000	1.00000000	18.00	EA
PH4 Pad Area	PH4 Pad Area	1.0000	1.00000000	370,338.05	SF
PH4 PCC Driveway Approach	PH4 PCC Driveway Approach	1.0000	1.00000000	10,904.39	SF
PH4 PCC Driveway Approach	PCC	6.0000	0.00308600	201.88	CY
PH4 PCC Driveway Approach	AB	6.0000	0.00308600	201.88	CY
PH4 PCC Sidewalk	PH4 PCC Sidewalk	1.0000	1.00000000	29,881.73	SF
PH4 PCC Sidewalk	PCC	6.0000	0.00308600	553.32	CY
PH4 PCC Sidewalk	AB	6.0000	0.00308600	553.32	CY
PH4 Truncated Domes	PH4 Truncated Domes	1.0000	1.00000000	577.41	SF
PH5 AC Paving at Jack Tusso Dr	PH5 AC Paving at Jack Tusso Rd	1.0000	1.00000000	33,153.58	SF
PH5 AC Paving at Jack Tusso Dr	AC	4.8000	0.00308600	491.09	CY
PH5 AC Paving at Jack Tusso Dr	AB	21.6000	0.00308600	2,209.93	CY
PH5 AC Paving at Lanes	PH5 AC Paving at Lanes	1.0000	1.00000000	3,805.83	SF
PH5 AC Paving at Lanes	AC	3.0000	0.00308600	35.23	CY
PH5 AC Paving at Lanes	AB	11.4000	0.00308600	133.89	CY
PH5 AC Paving at Neighborhood S	PH5 AC Paving at Neighborhood S	1.0000	1.00000000	37,304.41	SF
PH5 AC Paving at Neighborhood S	AC	3.0000	0.00308600	345.36	CY
PH5 AC Paving at Neighborhood S	AB	11.4000	0.00308600	1,312.38	CY
PH5 AC Paving at Turner Ave	PH5 AC Paving at Turner Ave	1.0000	1.00000000	18,760.52	SF
PH5 AC Paving at Turner Ave	AC	4.8000	0.00308600	277.90	CY
PH5 AC Paving at Turner Ave	AB	21.6000	0.00308600	1,250.53	CY
PH5 Curb & Gutter	PH5 Curb & Gutter	1.0000	1.00000000	6,141.98	LF
PH5 Curb Ramp	PH5 Curb Ramp	1.0000	1.00000000	18.00	EA
PH5 Pad Area	PH5 Pad Area	1.0000	1.00000000	312,094.94	SF
PH5 PCC Driveway Approach	PH5 PCC Driveway Approach	1.0000	1.00000000	11,783.35	SF
PH5 PCC Driveway Approach	PCC	6.0000	0.00308600	218.16	CY


SAMPLE SUBDIVISION
STRUCTURE

Structure 2

Structure	Material	Section (Inches)	Multiplier	Quantity	Unit
PH5 PCC Driveway Approach	AB	6.0000	0.00308600	218.16	CY
PH5 PCC Sidewalk	PH5 PCC Sidewalk	1.0000	1.00000000	28,099.01	SF
PH5 PCC Sidewalk	PCC	6.0000	0.00308600	520.29	CY
PH5 PCC Sidewalk	AB	6.0000	0.00308600	520.29	CY
PH5 Truncated Domes	PH5 Truncated Domes	1.0000	1.00000000	749.93	SF

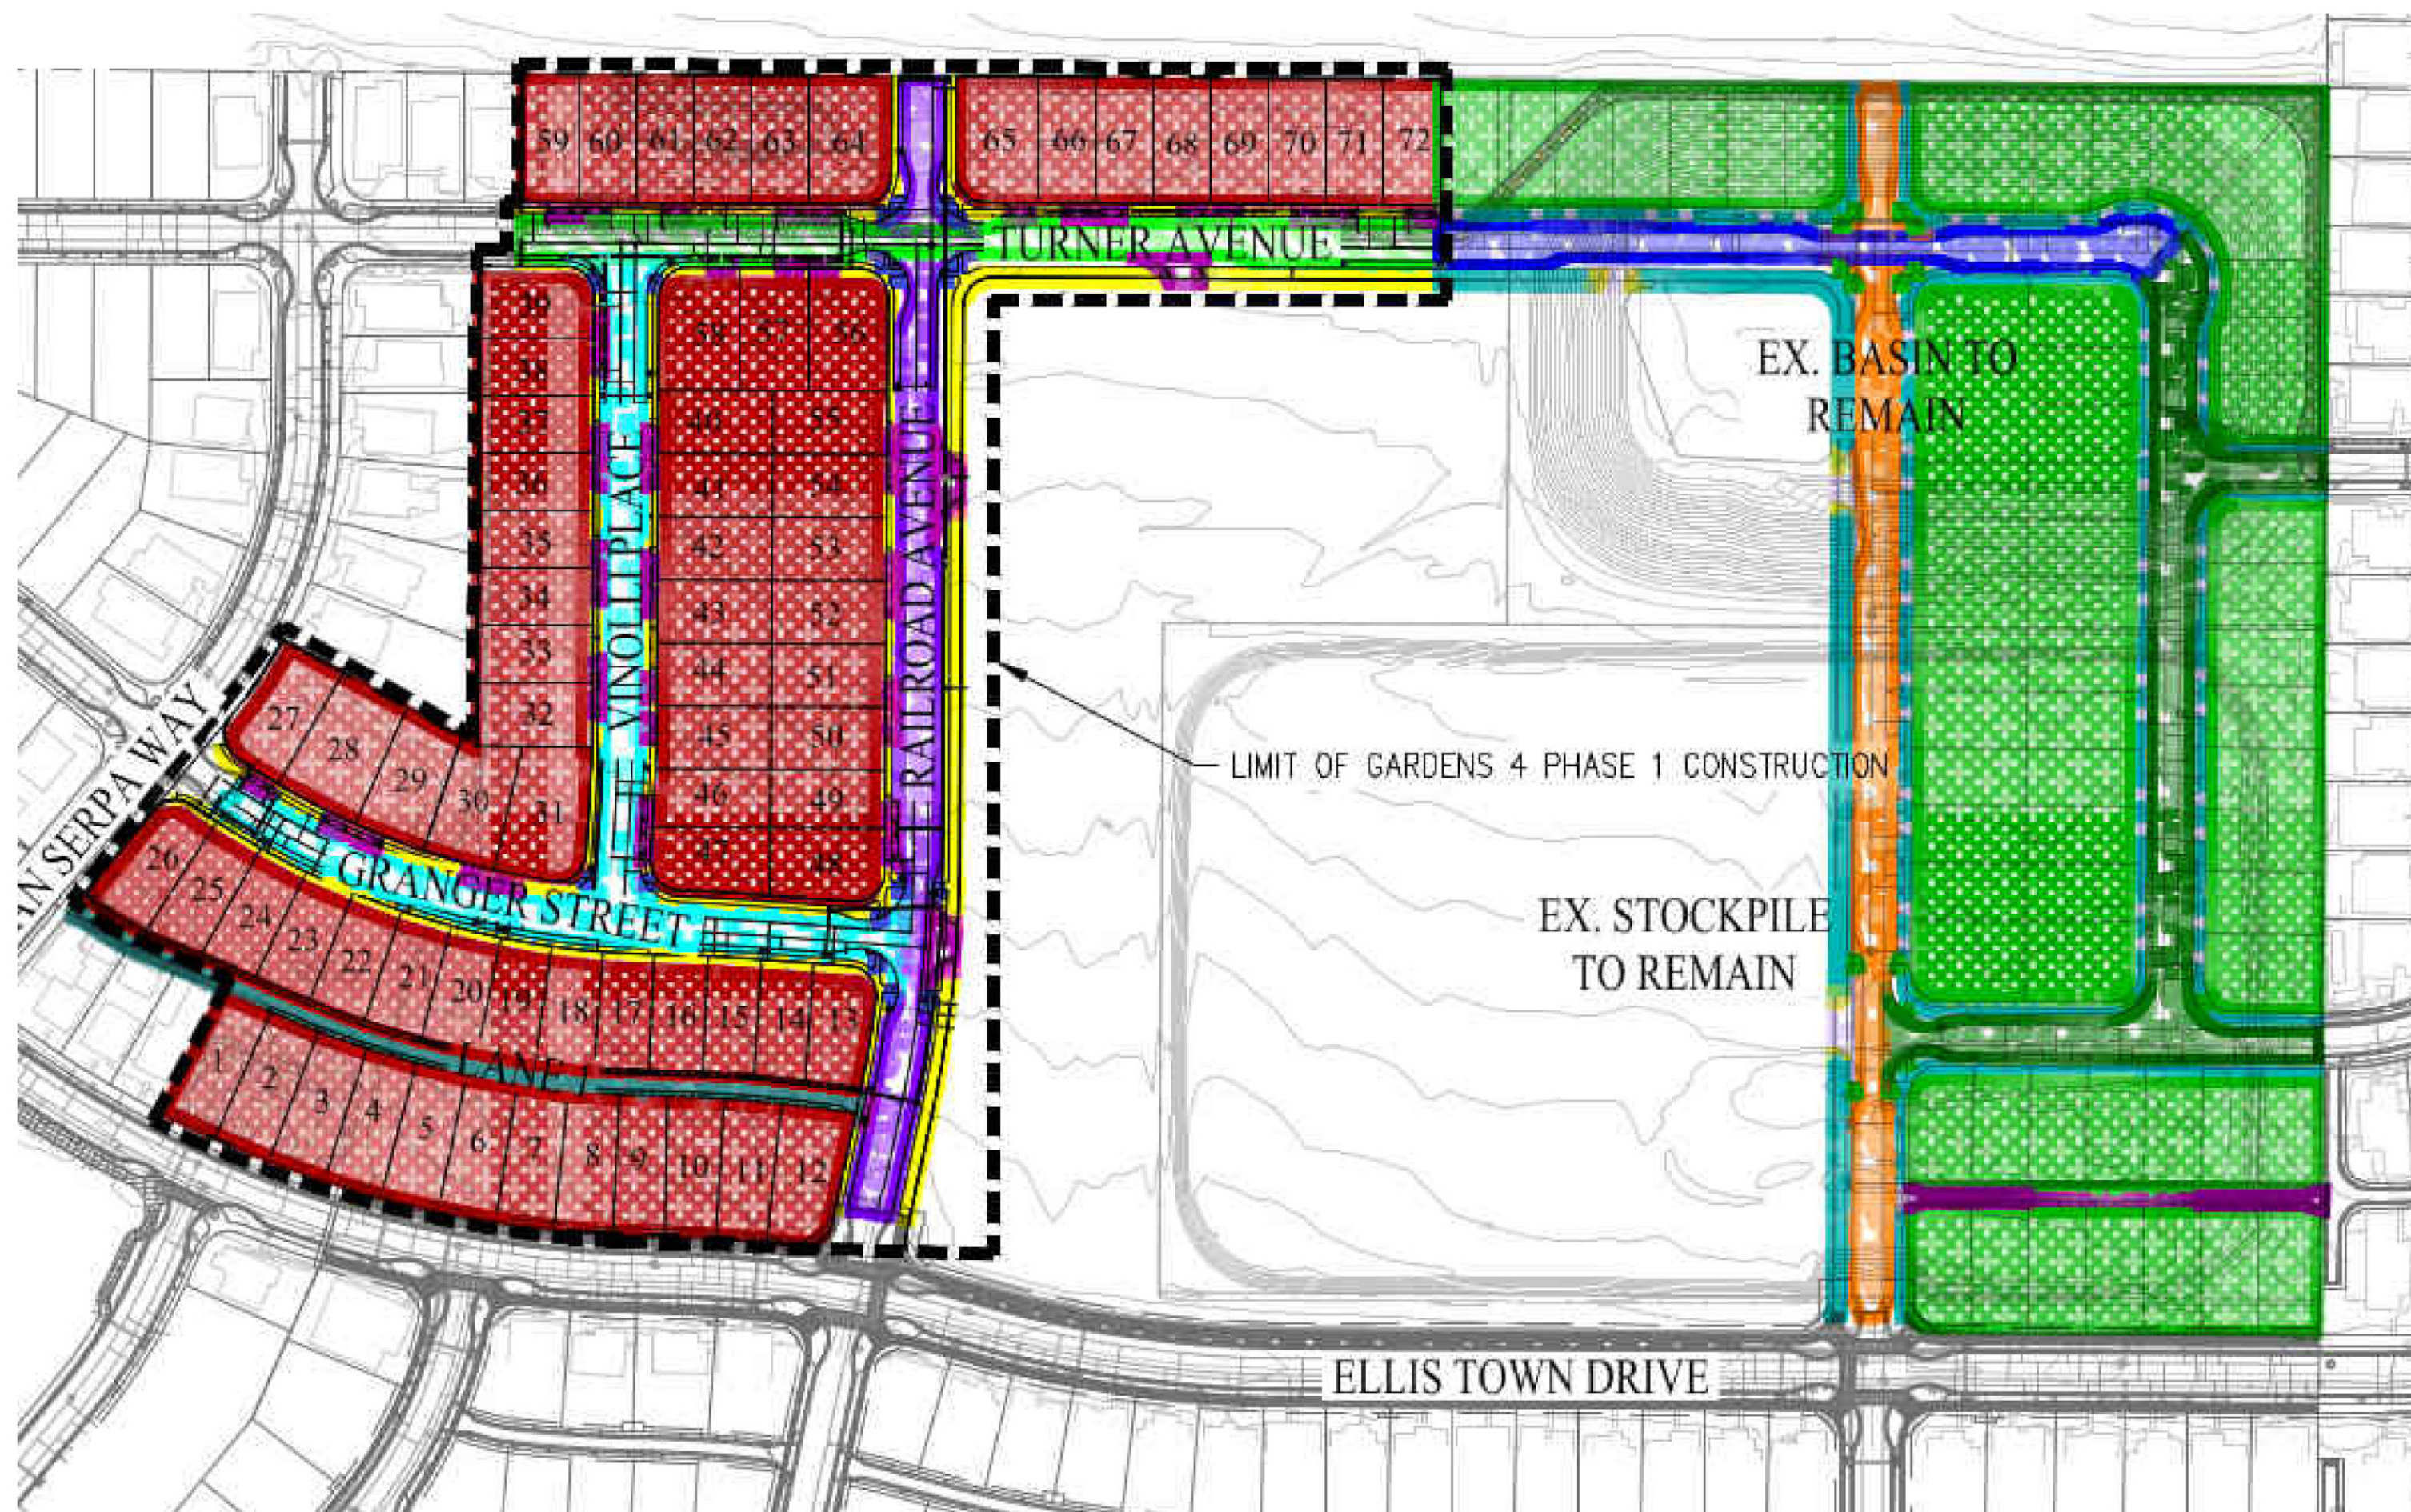

AREA

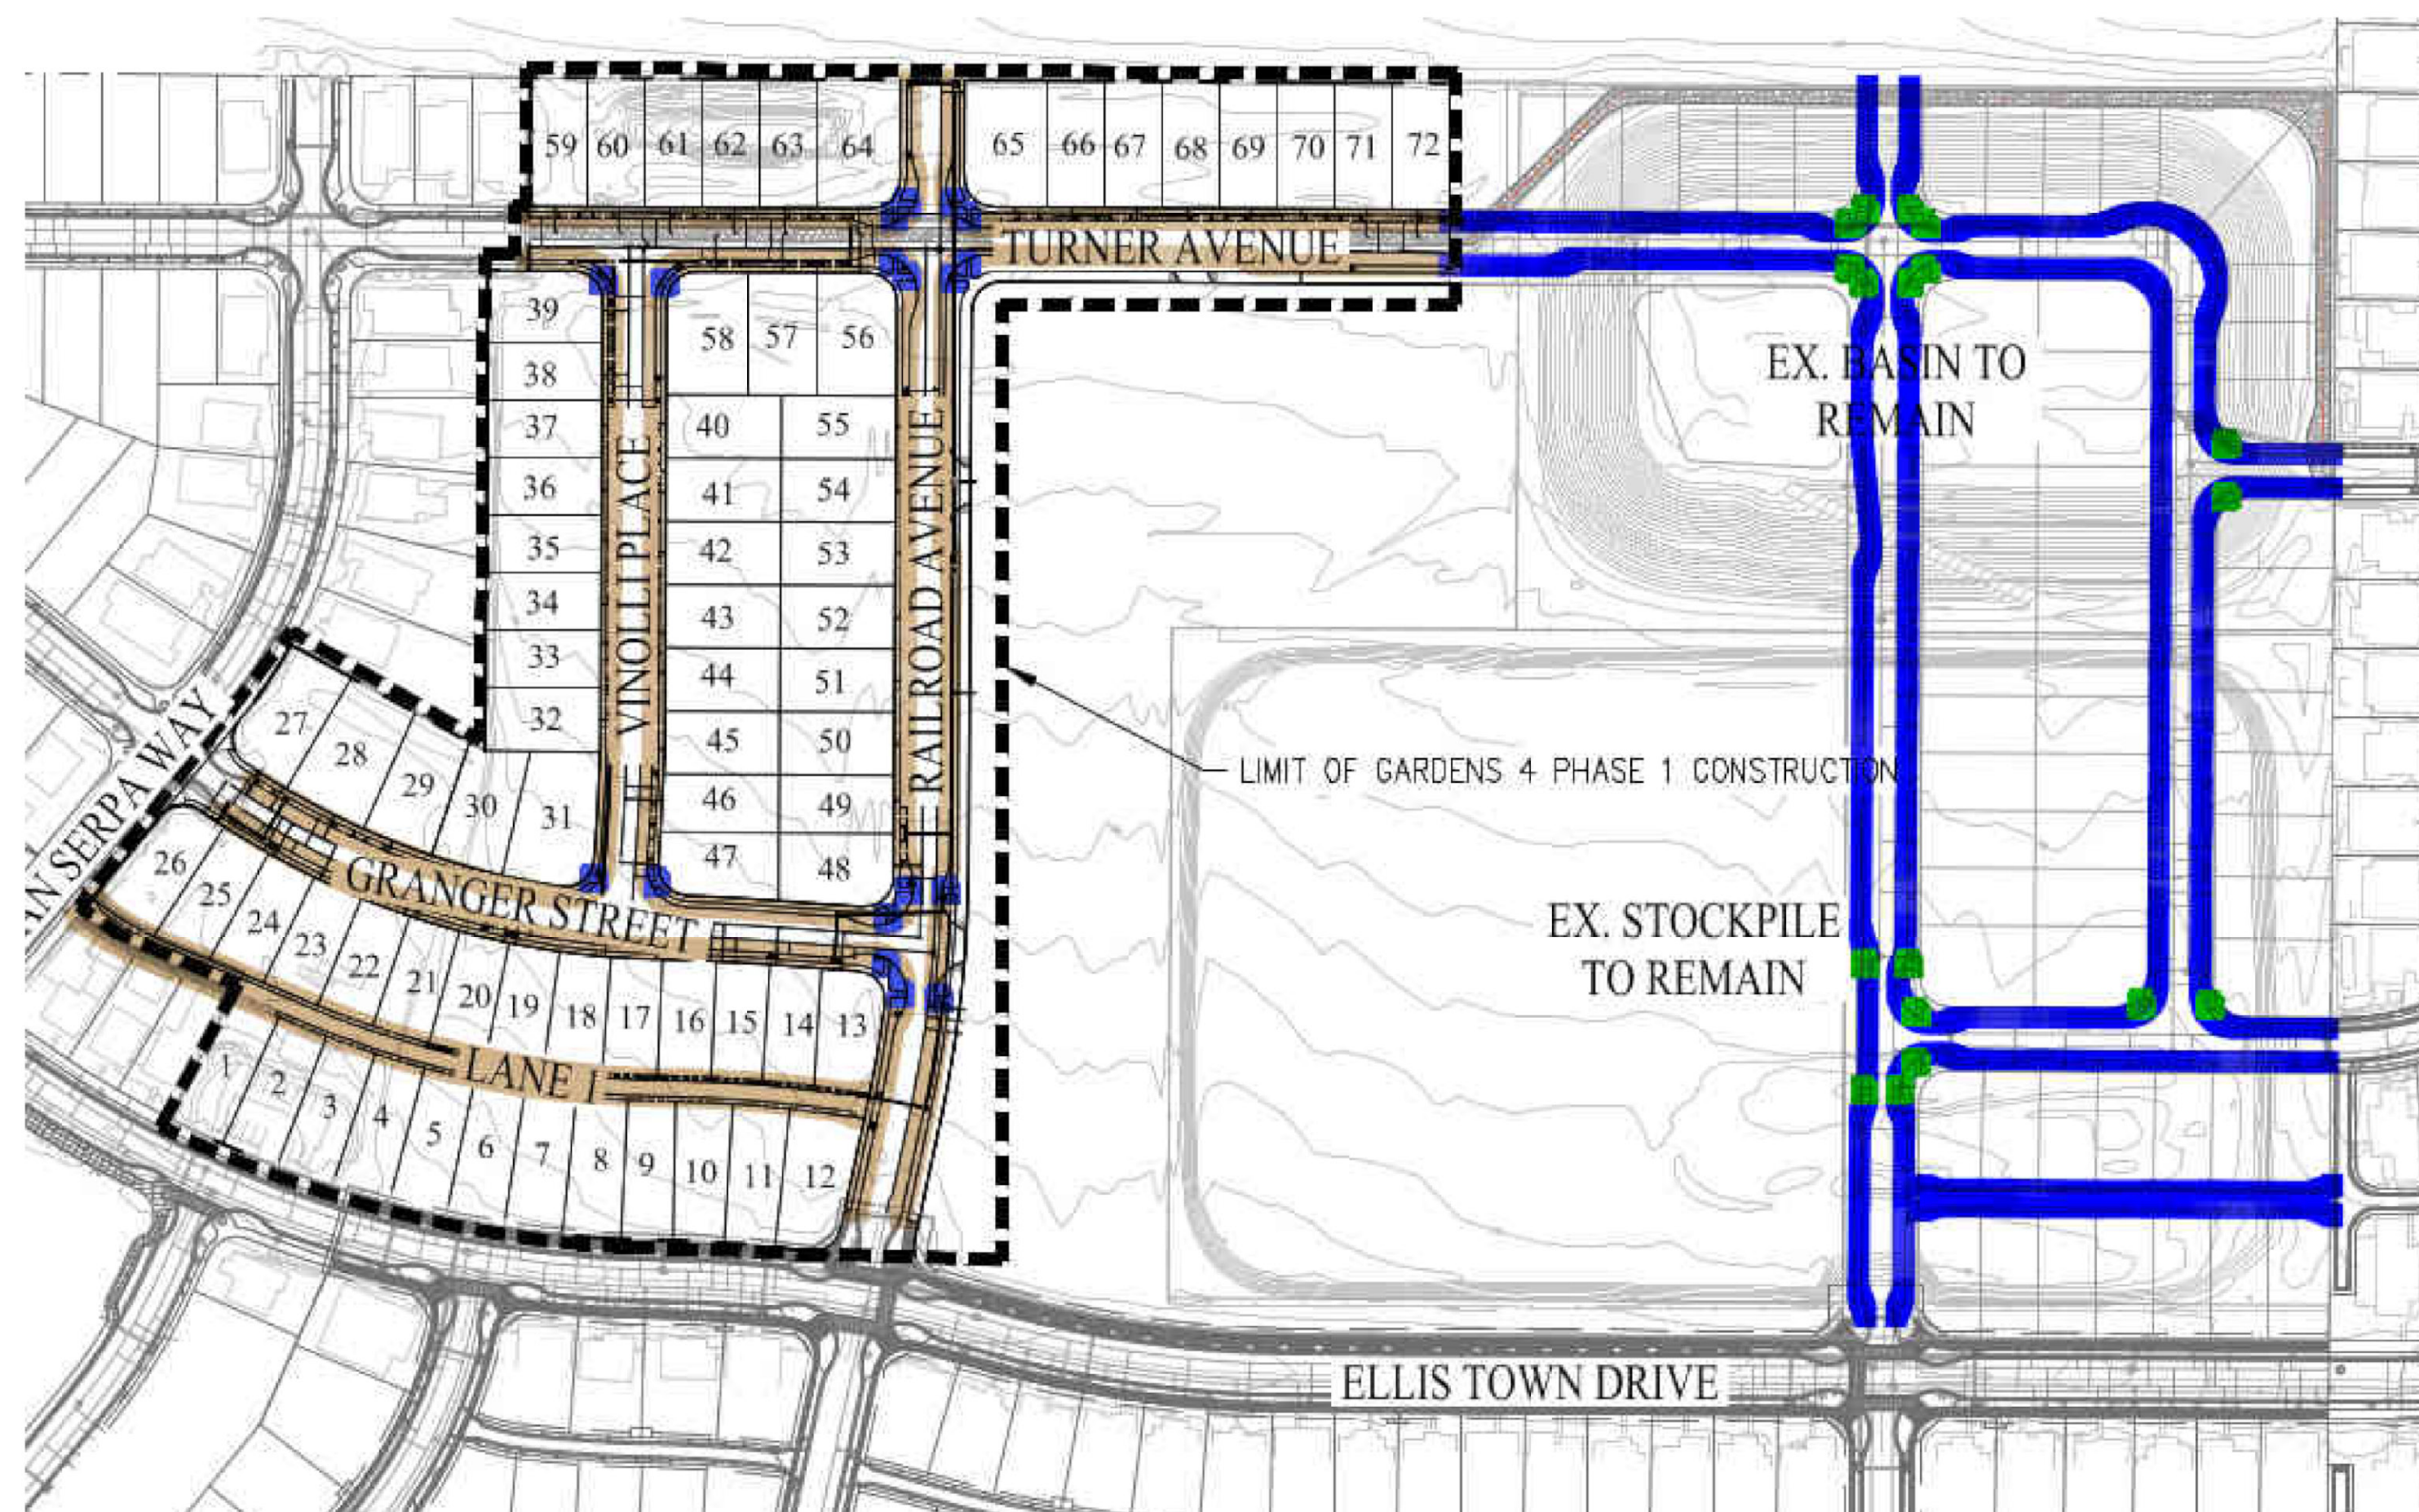

LENGTH

Structure	Material	Measure	Section	Multiplier	Quantity	Unit
PH4 AC Paving at Lanes	PH4 AC Paving at Lanes	7,249.35	1.0000	1.00000000	7,249.35	SF
PH4 AC Paving at Lanes	AC	7,249.35	3.0000	0.00308600	67.11	CY
PH4 AC Paving at Lanes	AB	7,249.35	11.4000	0.00308600	255.04	CY
PH4 AC Paving at Neighborhood St	PH4 AC Paving at Neighborhood St	38,819.92	1.0000	1.00000000	38,819.92	SF
PH4 AC Paving at Neighborhood St	AC	38,819.92	3.0000	0.00308600	359.39	CY
PH4 AC Paving at Neighborhood St	AB	38,819.92	11.4000	0.00308600	1,365.70	CY
PH4 AC Paving at Railroad Ave	PH4 AC Paving at Railroad Ave	29,411.47	1.0000	1.00000000	29,411.47	SF
PH4 AC Paving at Railroad Ave	AC	29,411.47	4.8000	0.00308600	435.67	CY
PH4 AC Paving at Railroad Ave	AB	29,411.47	21.6000	0.00308600	1,960.50	CY
PH4 AC Paving at Turner Ave	PH4 AC Paving at Turner Ave	23,367.33	1.0000	1.00000000	23,367.33	SF
PH4 AC Paving at Turner Ave	AC	23,367.33	4.8000	0.00308600	346.14	CY
PH4 AC Paving at Turner Ave	AB	23,367.33	21.6000	0.00308600	1,557.61	CY
PH4 Curb & Gutter	PH4 Curb & Gutter	7,005.53	1.0000	1.00000000	7,005.53	LF
PH4 Curb Ramp	PH4 Curb Ramp	18.00	1.0000	1.00000000	18.00	EA
PH4 Pad Area	PH4 Pad Area	370,338.05	1.0000	1.00000000	370,338.05	SF
PH4 PCC Driveway Approach	PH4 PCC Driveway Approach	10,904.39	1.0000	1.00000000	10,904.39	SF
PH4 PCC Driveway Approach	PCC	10,904.39	6.0000	0.00308600	201.88	CY
PH4 PCC Driveway Approach	AB	10,904.39	6.0000	0.00308600	201.88	CY
PH4 PCC Sidewalk	PH4 PCC Sidewalk	29,881.73	1.0000	1.00000000	29,881.73	SF
PH4 PCC Sidewalk	PCC	29,881.73	6.0000	0.00308600	553.32	CY
PH4 PCC Sidewalk	AB	29,881.73	6.0000	0.00308600	553.32	CY
PH4 Truncated Domes	PH4 Truncated Domes	577.41	1.0000	1.00000000	577.41	SF
PH5 AC Paving at Jack Tuso Dr	PH5 AC Paving at Jack Tuso Rd	33,153.58	1.0000	1.00000000	33,153.58	SF
PH5 AC Paving at Jack Tuso Dr	AC	33,153.58	4.8000	0.00308600	491.09	CY
PH5 AC Paving at Jack Tuso Dr	AB	33,153.58	21.6000	0.00308600	2,209.93	CY
PH5 AC Paving at Lanes	PH5 AC Paving at Lanes	3,805.83	1.0000	1.00000000	3,805.83	SF
PH5 AC Paving at Lanes	AC	3,805.83	3.0000	0.00308600	35.23	CY
PH5 AC Paving at Lanes	AB	3,805.83	11.4000	0.00308600	133.89	CY
PH5 AC Paving at Neighborhood St	PH5 AC Paving at Neighborhood St	37,304.41	1.0000	1.00000000	37,304.41	SF
PH5 AC Paving at Neighborhood St	AC	37,304.41	3.0000	0.00308600	345.36	CY
PH5 AC Paving at Neighborhood St	AB	37,304.41	11.4000	0.00308600	1,312.38	CY
PH5 AC Paving at Turner Ave	PH5 AC Paving at Turner Ave	18,760.52	1.0000	1.00000000	18,760.52	SF
PH5 AC Paving at Turner Ave	AC	18,760.52	4.8000	0.00308600	277.90	CY
PH5 AC Paving at Turner Ave	AB	18,760.52	21.6000	0.00308600	1,250.53	CY
PH5 Curb & Gutter	PH5 Curb & Gutter	6,141.98	1.0000	1.00000000	6,141.98	LF
PH5 Curb Ramp	PH5 Curb Ramp	18.00	1.0000	1.00000000	18.00	EA
PH5 Pad Area	PH5 Pad Area	312,094.94	1.0000	1.00000000	312,094.94	SF
PH5 PCC Driveway Approach	PH5 PCC Driveway Approach	11,783.35	1.0000	1.00000000	11,783.35	SF
PH5 PCC Driveway Approach	PCC	11,783.35	6.0000	0.00308600	218.16	CY
PH5 PCC Driveway Approach	AB	11,783.35	6.0000	0.00308600	218.16	CY
PH5 PCC Sidewalk	PH5 PCC Sidewalk	28,099.01	1.0000	1.00000000	28,099.01	SF
PH5 PCC Sidewalk	PCC	28,099.01	6.0000	0.00308600	520.29	CY
PH5 PCC Sidewalk	AB	28,099.01	6.0000	0.00308600	520.29	CY
PH5 Truncated Domes	PH5 Truncated Domes	749.93	1.0000	1.00000000	749.93	SF

